

Arcus LBo5-KRo1

Kraan open/dicht, een water aansluiting.

Tap open/close, one water affiliation.

UITRUSTING


Afmeting profiel:	150 mm x 50 mm
Materiaal:	RVS 304
Afwerking:	geborsteld RVS
Douchekop:	geïntregeerde kunststof douchekop 190 mm x 130 mm
Kraan:	enkele aansluiting open/dicht functie RVS 304
Omstel:	nvt
Handdouche:	nee

Montage:	U-profiel in kolom (standaard) RVS 304
Grondbevestiging:	zie pagina 94 t/m 95
Aanbevolen waterdruk:	2-4 bar aan douchekolom
Aansluiting	naar waterleiding G 1/2
Kleur:	ook verkrijgbaar in alle RAL kleuren

EQUIPMENT

Dimension of profile:	150 mm x 50 mm
Material:	Stainless steel/ Inox Aisi 304
Finish:	brushed stainless steel
Showerhead:	integrated showerhead 190 mm x 130 mm
Tap:	single jack open/close function stainless steel/Inox Aisi 304
Diverter:	does not apply
Hand shower:	no

Mounting:	U-profile in column (standard) stainless steel/Inox Aisi 304
Ground Fixing:	see page 94 utai 95
Advised waterpressure:	2-4 bar
Connection:	watersupply G 1/2
Colour:	also available in all RAL colours

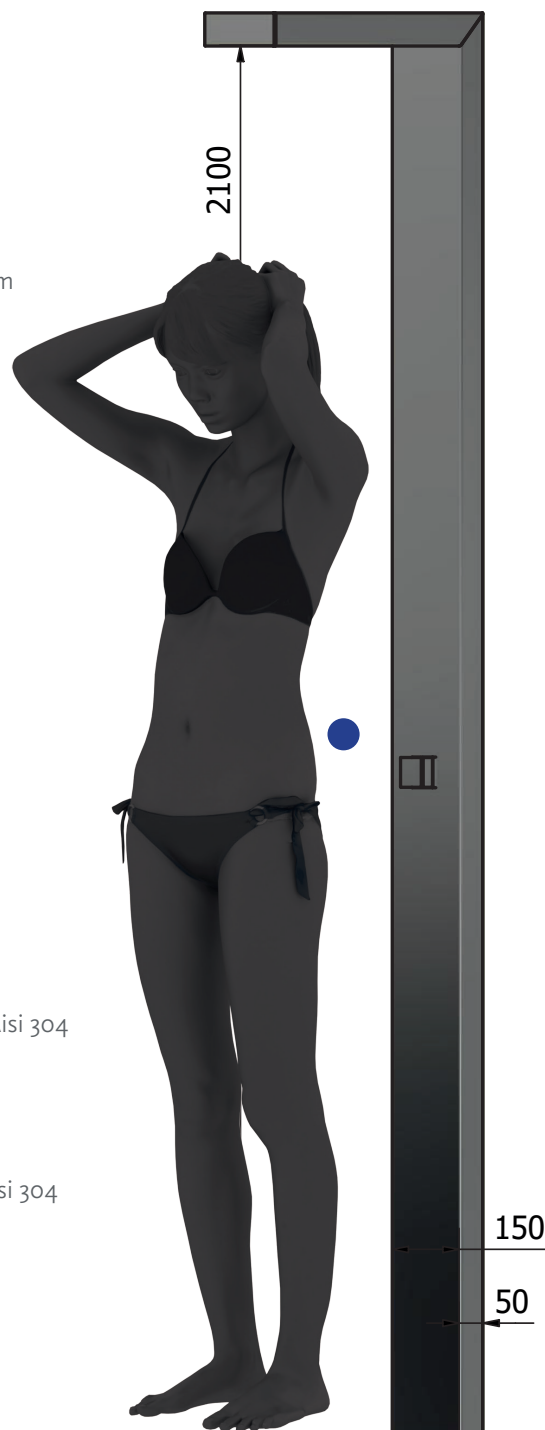

het model onder de buitendouche is 180 cm lang



Configureer deze
buitendouche
geheel naar wens
op onze website.